

PC-6345 Pressure Sensor Die



- 0 to 50 kPa range (0.5bar or 7PSI) •
- Gage/differential pressure sensors •
- Relative pressure sensors

DESCRIPTION

The PC-6345 die is a piezoresistive pressure sensor designed for low pressure applications. This die combines bulk micromaching technology, implanted piezoresistors and electrochemical etch stop. This die is available in 0 to 50 kPa pressure ranges in both gage and differential configurations. The PC-6345 die sensors are offered in open bridge (two independent half bridges) configurations .

FEATURES

- Relative pressure sensors
- -40°C to +125°C Temperature Range
- $\pm 0.1\%$ Linearity
- Die Size: 2.60 x 2.60x1.03mm
- Low Cost, High Reliability

APPLICATIONS

- Process Control
- Industrial Control
- HVAC
- Patient Monitoring

CHIP DIMENSIONS

PARAMETERS	TYP	MAX	UNIT
Die Length	2.60		mm
Die Width	2.60		mm
Die Height (with glass constraint)	1.03		mm
Pad Size	150x150		microns
Gage Hole Diameter	0.6		mm

PC-6345 Pressure Sensor Die

PERFORMANCE SPECIFICATION


PARAMETER	VALUE	UNITS	NOTES
GENERAL			
Pressure Range	50	kPa	
Over Pressure	3x	FS	
Burst Pressure	5x	FS	
ENVIRONMENTAL			
Temperature Range			
Operating	-40 to +125	°C	
Storage	-55 to +150	°C	
MECHANICAL			
Media Compatibility	Clean, dry air and	noncorrosive gases	
ELECTRICAL @ 25°C, 1.0mA unless otherwise stated. Also see note 3			
Sensitivity	80±20	mV	
TC Sensitivity	-2300	ppm/°C	
Offset	±5	mV/V	
TC Offset	±0.01	%FSO/°C	
Bridge Resistance	15	kΩ	
TC Resistance	3600	ppm/°C	
Linearity Error	±0.1	%FSO	
Excitation	5	V	

NOTES:


1. Best fit straight line.
2. Temperature Coefficient values over 0°C to 50°C with reference to 25°C.
3. Die performance will vary with packaging and assembly methods.

CONNECTIONS

SCHEMATIC DIAGRAM

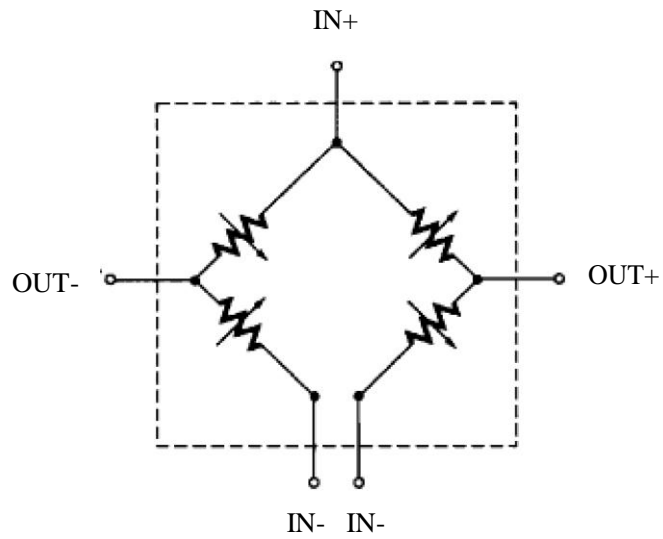


WIREBOND DIAGRAM

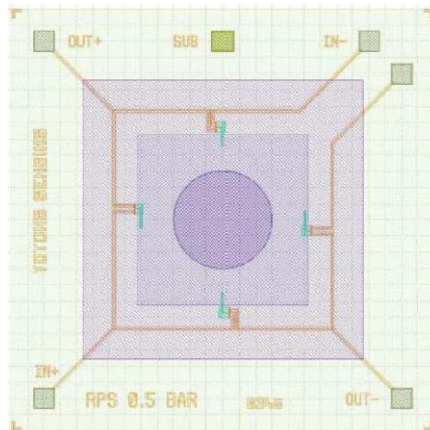

PC-6345 Pressure Sensor Die

ORDERING INFORMATION

P-6345G-010K- C

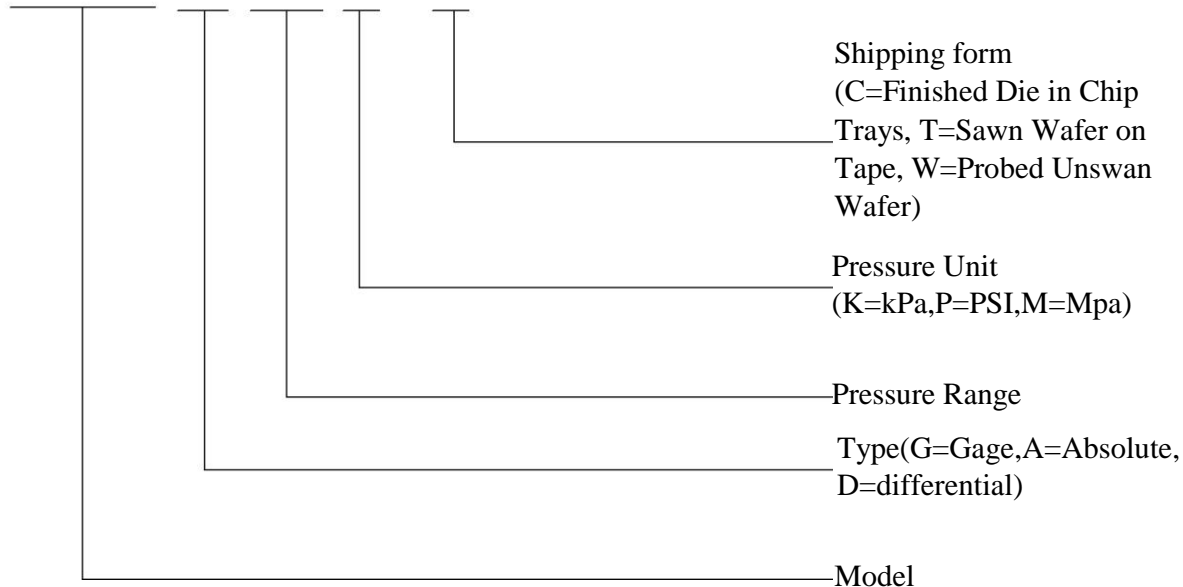

Contact us

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Yoyong Sensing reserves the right to make changes without further notice to any product herein. Yoyong Sensing makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Yoyong Sensing assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Yoyong Sensing does not convey any license under its patent rights nor the rights of others.

Contact Information:

BAYSTAR ELECTRUMENT Co.LTD

Tel: 001-408-272-3669

www.baystar-inc.com

info@baystar-inc.com